

A close-up photograph of the Vyntus BODY machine, showing its sleek, modern design with metallic and black components. The machine is positioned against a background of soft, wavy blue lines. The text "Vyntus BODY" is printed in a large, white, sans-serif font on a dark, curved surface of the machine.

Vyntus BODY

vyaire™
MEDICAL

Vyntus™ BODY

body plethysmography – designed to be different

Key Features



Equally spread magnets for a tight closure of the door



Stable hand grip



Spacious cabin with 1110 L



Optional height adjustable cart



Low entry step of only 7 cm



Optional integrated aerosol provocation system



Ultrasonic sensor for high accuracy



Flexible 3D arm



Flexible chair - for up to 150 kg
Optional bench - for up to 250 kg



Flexibility that makes the Vyntus BODY different

The flexible 3D arm of the
Vyntus BODY:

- Can be extended outside of the cabin up to an impressive reach of 63 cm
- Patients in a wheelchair can be measured easily and comfortably outside the cabin
- Is adjustable in height and position and perfectly adapts to your patients needs



Performing excellence in pulmonary function testing


Measurement Testing Capabilities

(Specific) Airway Resistance	sReff, sRtot, sR0.5, sRmid as well as Reff, Rtot, R0.5, Rmid and others
Static lung volumes	Absolute lung volumes: TLC, FRCpleth, RV, RV/TLC and others Static Lung Volumes: VC MAX, IC, ERV and others
Dynamic Lung Volumes	FVC, FEV1, FEV1/FVC, MFEF 25-75, FEF 75, PEF and others

All-in-one cabin options:

SB Diffusion	Realtime with determination of DLCO, KCO, VA, TLC, FRC, RV and others. Intra-breath without breathhold and trapped gas evaluation
MIP/MEP	Maximum inspiratory and expiratory pressures
SNIP	Sniff nasal inspiratory pressure
P0.1	Easily measured respiratory drive of tidal breathing
Rocc	Single occlusion resistance measurement
Rhinomanometry	Measurement of the nasal flows and resistances
Compliance	Measurement of the dynamic and/or static compliance from the esophagus pressure-volume curve
Bronchial Challenge Testing	Vyntus APS – for automated, software controlled, safe and accurate bronchial provocation testing

Body plethysmography result view

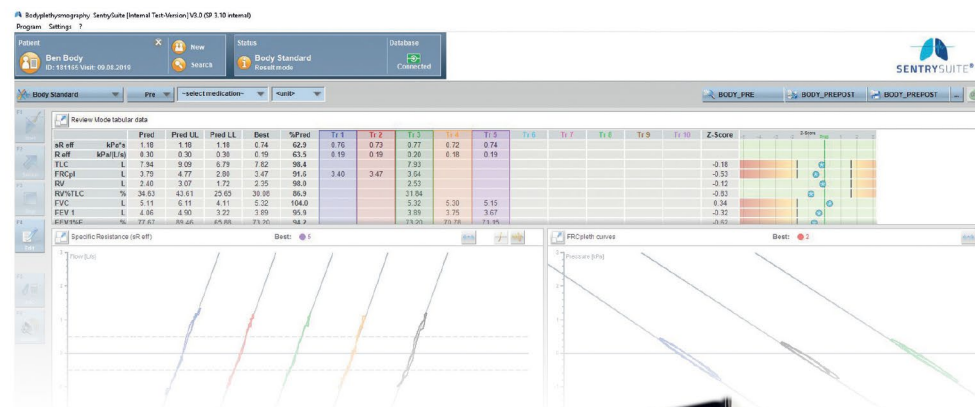

We reengineered every facet of Vyntus BODY's breathing circuit, to achieve **significant improvements** in patient's comfort and accuracy

ULTRASONIC SENSOR

Double Shot Technology measures twice the number of signals across the flow path providing **enhanced data resolution and precision**.

Dynamic Flow Correction: already during the flow measurement we are measuring the gas temperature of each breath. With this information an online BTPS correction is carried out leading to a higher **accuracy and minimizing any drifts**.

Polytubes on both sides of the ultrasonic sensor for flow conditioning **making the air laminar**.

Calibration-free: **stay focused on your patients**.


Waterproof: **makes hygiene routines fast and easy**. There is no need to dis- and reassemble the sensor for the cleaning process.

Patient centricity: No meshes or orifices mean a low resistance and **very comfortable breathing feeling** for the patient.

FLOWPATH VALVE

Simple, maintenance free, magnetically-controlled rotary shutter is **highly responsive to patient effort**. This means an **easier and noise reduced testing experience** as well as testing it right the first time.

Ultrasonic sensor

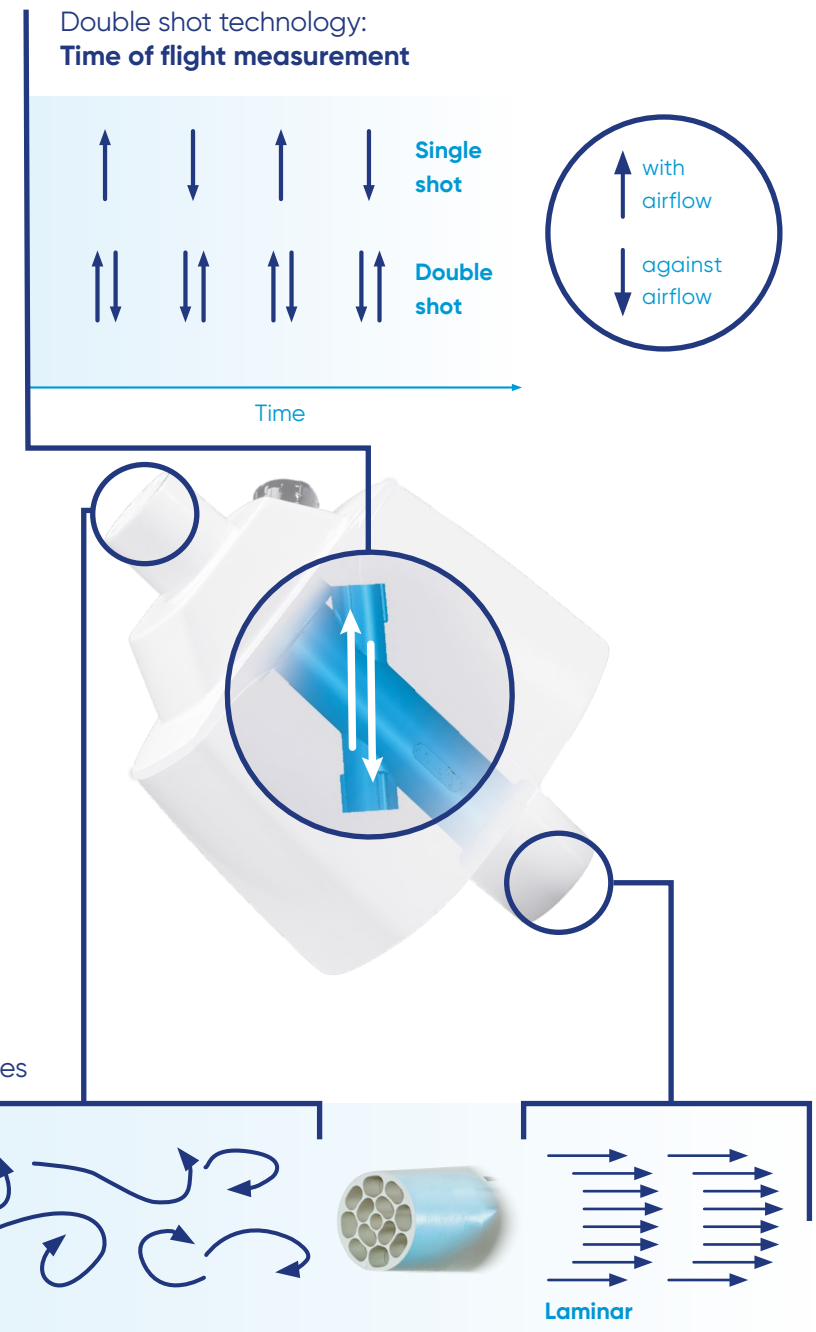



Stop Cross-Contamination!

The MicroGard™ II filter:

- **Reprocessing cycle** for downstreamed parts can be **reduced to twice a year** using the MicroGard filter*
- **Protects** your patients, staff, environment and instruments **from viral and bacterial contamination**
- Follows the highest safety standards
- Has an **exceptionally low resistance** to air flow
- The impact on measurement results is completely removed
- Is the only **validated filter** for the Vyntus BODY




Easy and optimized post-test decision making - visual diagnostic using the Resistance-Volume-Chart

The Resistance-Volume-Chart combines airways resistance and lung volume results in a single breath with no changes in the testing procedure:

Easily analyze the shape of the entire breathing cycle

Quick recognition of pre-post benefit of the therapy

Predicted area for quick orientation

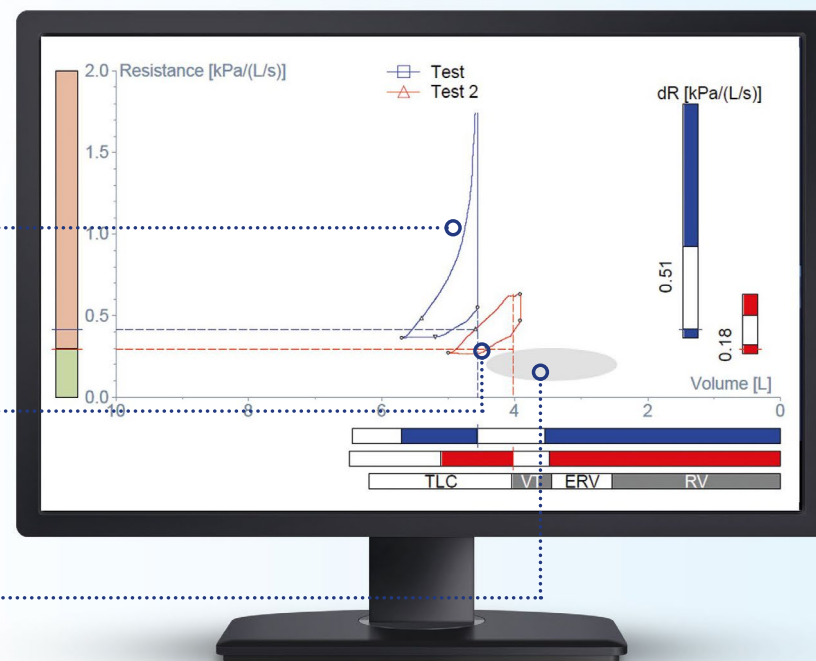

Smart Diagnostics – Improve clinical outcome while saving valuable time

The Vyntus BODY is controlled by the powerful and easy to use **SentrySuite™ software package**. In less than two minutes any operator can smoothly perform a workflow including airways resistance, lung volumes, subdivisions and forced spirometry.

Guidance and coaching

- Graphical and textual guidance for improved patient instruction and control
- Choice of 10 incentives for children and non-cooperative patients

Quality control

- Strictly follows ATS/ERS standards and recommendations
- Quality tab for fast and extensive error detection

Results review


- Highly versatile report program for parameters, graphs and comments
- Features like Z-score calculation, classification bars and interpretation schemes, based on reference values of numerous authors



*based on the Bio Burden DIN EN ISO 11737-1: Report 18AA0193

GLOBAL HEADQUARTERS

Vyairē Medical, Inc.
26125 North Riverwoods Blvd
Mettawa, IL 60045
USA

 Vyairē Medical GmbH
Leibnizstrasse 7
97204 Hoechberg
Germany



AUSTRALIAN SPONSOR

Vyairē Medical Pty Ltd
Suite 5.03, Building C
11 Talavera Road
Macquarie Park, NSW 2113
Australia

vyaire.com

For Australia, Canada, EU, Indonesia, Malaysia, Mauritius, Latin America, Middle East, South Africa, Switzerland and Turkey distribution only.

© 2021 Vyairē Medical, Inc. or one of its affiliates. All rights reserved. Vyairē, the Vyairē Medical logo and all other trademarks are trademarks or registered trademarks of Vyairē Medical, Inc. or one of its affiliates. Medical devices class IIa according to Medical Devices Directive 93/42/EEC. Please read the complete Instructions For Use that come with the devices or follow the instructions on the product labeling. | VYR-INTL-1900021 (3.0)